


Stand-alone Skid

Class B




FEATURES

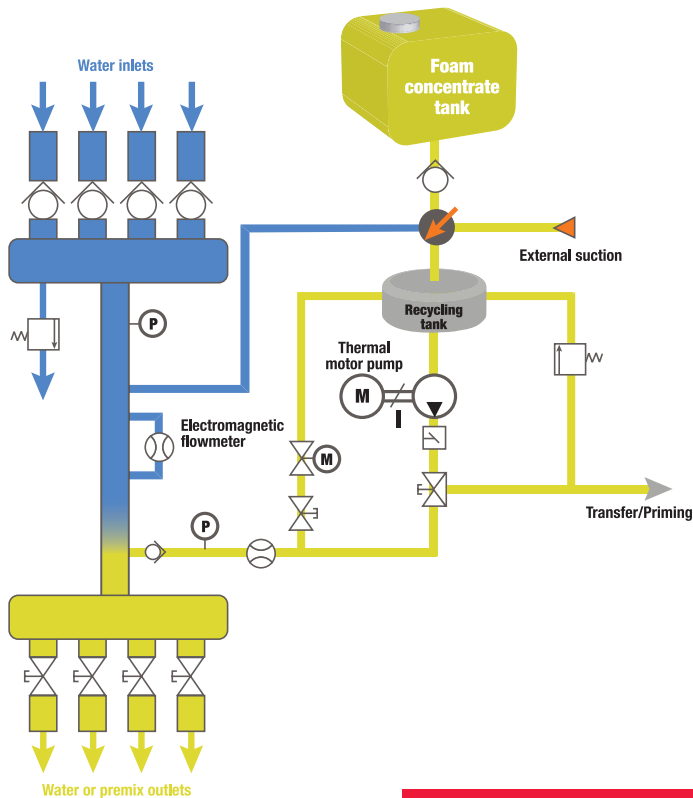


	120	180	240	360	600
* by default					
Pump flow range ⁽¹⁾	6 to 120 lpm	8 to 180 lpm	12 to 240 lpm	15 to 360 lpm	40 to 600 lpm
Pump type	Piston				Gear
Suction	-0.6 bar				-0.7 bar
Pressure	16 bar				
Dosing range*	1 to 6%				
Water flow range*	4": 200 to 5,000 lpm	5": 300 to 8,000 lpm	6": 400 to 12,000 lpm		
Inlet/outlet manifold	On demand				
Motorisation	Thermal				
Product viscosity compatibility	< 220 Mpa.s ⁽²⁾ at 20°C				< 400 Mpa.s ⁽²⁾ at 20°C
Flushing	Automated				
Priming	Automated				

⁽¹⁾ Other pump flow rate ranges available on request - ⁽²⁾ At 375 s⁻¹ shear rate following the norm EN 1568-3:2018



POSSIBLE OPTIONS

-  Product tank filling
-  Product transfer
-  Product pumping

-  External suction hose
-  Tank level sensor
-  Floating battery charger